



CLIENT: POLYGAL, INC.
P.O. Box 410592
Charlotte, NC 28241
Ward Ogle

Test Report No: 840349-1	Date: January 24, 2007
---------------------------------	-------------------------------

SAMPLE ID: The Client submitted and identified the following test material as Polygal 4mm Polycarbonate panels.

DATE OF RECEIPT: Entered into SGS USTC sample tracking system on December 7, 2006.

TESTING PERIOD: December 26, 2006.

AUTHORIZATION: Testing authorized by Ward Ogle.

TEST REQUESTED: Perform standard flame spread and smoke density developed classification tests on the sample supplied by the Client in accordance with ASTM Designation E84-05, "Standard Method of Test for Surface Burning Characteristics of Building Materials". The foregoing test procedure is comparable to UL 723, ANSI/NFPA No. 255, and UBC No. 8-1.

TEST RESULTS:	<u>Flame Spread</u>	<u>Smoke Density</u>
	0	30

For detailed results see page 3.

Tested by


Brian Ortega
Test Technician

**Signed for and on behalf of
SGS U.S. Testing Company Inc.**


Greg Banasky
Supervisor Fire Technology

Page 1 of 4

This report is issued by SGS U.S. Testing Company Inc. under its General Conditions for Testing Services (copy available on request). SGS U.S. Testing's responsibility under this report is limited to proven negligence and will in no case be more than the amount of the testing fees. Except by special arrangement, samples are not retained by SGS U.S. Testing for more than 30 days. The results shown on this test report refer only to the sample(s) tested unless otherwise stated, under the conditions agreed upon. Anyone relying on this report should understand all of the details of the engagement. Neither the name, seals, marks nor insignia of SGS U.S. Testing may be used in any advertising or promotional materials without the prior written approval of SGS U.S. Testing. The test report cannot be reproduced, except in full, without prior written permission of SGS U.S. Testing Company Inc.



CLIENT: POLYGAL, INC.

PREPARATION AND CONDITIONING: The sample material was submitted in three pieces, 22" wide by 96" long, conforming to test chamber dimensions. The sample was supported during testing by 2" hexagonal mesh poultry netting running the length of the test chamber and 1/4" round metal rods placed at two foot intervals across the width of the test chamber.

Prior to testing, the specimen was placed in the conditioning room (maintained at $73.4 \pm 5^\circ$ F and a relative humidity of $50 \pm 5\%$) and allowed to reach moisture equilibrium.

CEMENT BOARD PLACEMENT: The cement boards were placed between the specimen and the furnace lid assembly.

SUMMARY OF ASTM E84 RESULTS: Because of the possible variations in reproducibility, the results are adjusted to the nearest figure divisible by 5. Smoke Developed values over 200 are rounded to the nearest figure divisible by 50.

<u>SAMPLE IDENTIFICATION</u>	<u>FLAME SPREAD</u>	<u>SMOKE DENSITY</u>
Polygal 4mm Polycarbonate Panels	0	30

In order to obtain the Flame Spread Classification, the above results should be compared to the following table:

<u>NFPA CLASS</u>	<u>UBC CLASS</u>	<u>FLAME SPREAD</u>
A	I	0 through 25
B	II	26 through 75
C	III	76 through 200

BUILDING CODES CITED:

1. National Fire Protection Association, ANSI/NFPA No. 101, "Life Safety Code", 1994 Edition.
2. Uniform Building Code, 1994 Edition, Chapter 8, Interior Finishes, Sections 801-807.



CLIENT: POLYGAL, INC.

Report No.: 840349-1
Date: January 24, 2007
Page: 3 of 4

E 84 TEST DATA SHEET:

CLIENT: Polygal, Inc. DATE: 12/26/06

SAMPLE: Polygal 4mm Polycarbonate panels

FLAME SPREAD:

IGNITION: 51 seconds

FLAME FRONT: 0 feet maximum

TIME TO MAXIMUM SPREAD: N/A


TEST DURATION: 10 minutes

CALCULATION: N/A

N/A = Not applicable.

SUMMARY: FLAME SPREAD: 0 SMOKE DENSITY: 30

OBSERVATIONS: Sample surface ignition was observed at 51 seconds. A flame front advance was not observed during the test period.

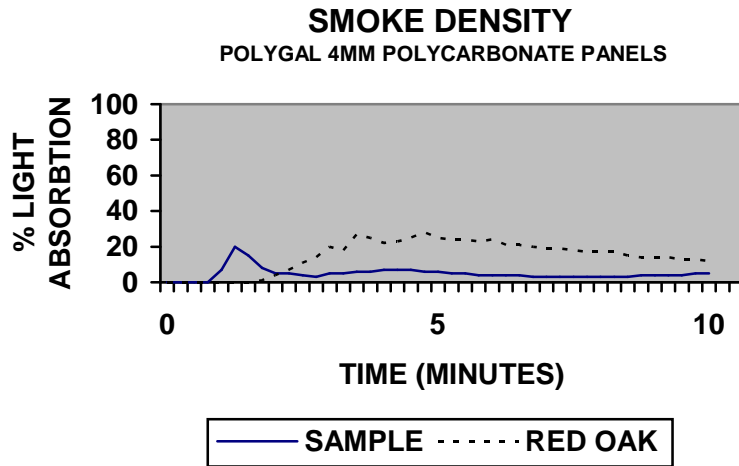

End of Report